

Pinch Fix Bracket, Railed

AXE_AL_BR_PF_RD

Durable

Non-corrosive materials for the toughest environmental conditions. Strength and integrity testing done.

Innovative

Integration with railed solution. Connection holes on side and top of bracket for connections to standing rib and horizontal rib.


Versatile

Attach to wide variety concealed fix roofs. Fixation of rails.

Effortless

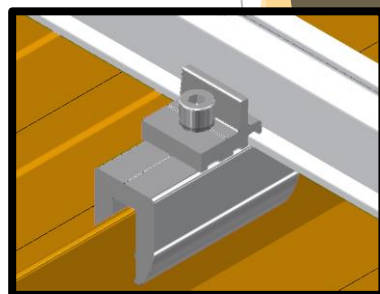
Convenient installation with accessible fasteners for saving installation time. No sheet penetration needed.

Dimensions

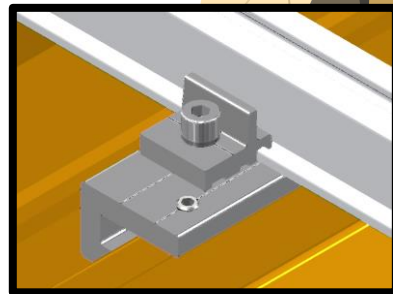

L 60mm * W 30mm *
H 66mm
185g

Application	Roof Top – Railed
Roof types	Brownbuilt Craft-Lok Dimondek Consult for other roof manufacturers
Test protocol	Structural analysis to obtain reaction forces for each possible scenario. Pull tests on clamped bracket FEM analysis on part under load
Materials	<u>Fasteners:</u> Stainless Steel (A2) “Available in Stainless steel (A4)” <u>Body:</u> Extruded aluminium (6063 T6) Anodised with 15µm layer “Anodising available in 25µm layer”
Length	80mm for optimal roof contact and maximum strength
Manufactured	100% South African produce and fabricated
Warranty	10 years ¹

Integration with Railed system
connection on standing rib



Integration with Railed system
connection on horizontal rib



¹ For terms and conditions please refer to the Axe Struct Warranty Terms.